



TP-Link Omada POE160S adaptador e inyector de PoE Gigabit Ethernet

Marca : TP-Link

Familia de productos: Omada **Código del producto:** POE160S

Nombre del producto : POE160S



TP-Link Omada POE160S. Tipo de interfaz ethernet: Gigabit Ethernet, Ethernet LAN, velocidad de transferencia de datos: 10,100,1000 Mbit/s, Tecnología de cableado: 10/100/1000. Color del producto: Negro, Distancia de funcionamiento máximo: 100 m, Indicadores LED: Poder. Potencia de salida: 30 W, Voltaje de entrada de adaptador AC: 100 - 240 V, Frecuencia de adaptador AC: 50/60 Hz. Ancho: 125 mm, Profundidad: 59,4 mm, Altura: 36,8 mm. Número de productos incluidos: 1 pieza(s)




Conexión		Condiciones ambientales	
Tipo de interfaz ethernet	Gigabit Ethernet	Intervalo de temperatura operativa	0 - 40 °C
Ethernet LAN, velocidad de transferencia de datos	10,100,1000 Mbit/s	Intervalo de humedad relativa para funcionamiento	10 - 90%
Tecnología de cableado	10/100/1000	Intervalo de temperatura de almacenaje	-40 - 70 °C
Energía sobre Ethernet (PoE)	✓	Intervalo de humedad relativa durante almacenaje	5 - 90%
Estándares de red	IEEE 802.3ab, IEEE 802.3af, IEEE 802.3at, IEEE 802.3i, IEEE 802.3u	Peso y dimensiones	
Tipos de cable soportados	Cat3, Cat4, Cat5, Cat5e	Ancho	125 mm
Características		Profundidad	59,4 mm
Color del producto	Negro	Altura	36,8 mm
Montaje de pared	✓	Contenido del embalaje	
Conectar y usar (Plug and Play)	✓	Número de productos incluidos	1 pieza(s)
Distancia de funcionamiento máximo	100 m	Kit de montaje en pared	✓
Indicadores LED	Poder	Cable de alimentación incluido	✓
Puertos e Interfaces		Guía de instalación rápida	✓
Ethernet LAN (RJ-45) cantidad de puertos *	2	Empaquetado	
Puertos de entrada RJ-45	1	Ancho del paquete	170 mm
Puertos de salida RJ-45	1	Profundidad del paquete	230 mm
Control de energía		Altura del paquete	80 mm
Potencia de salida	30 W	Peso del paquete	460 g
Voltaje de entrada de adaptador AC	100 - 240 V	Tipo de embalaje	Caja
Frecuencia de adaptador AC	50/60 Hz		



8592978537609



1210002617284

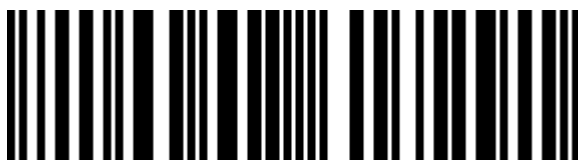

1210002617291



0121002617284



121002617284



0840460605304



840460605304

Catalog Object Cloud



Disclaimer: The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.