



## TP-Link Omada EAP653 punto de acceso inalámbrico 2976 Mbit/s Blanco Energía sobre Ethernet (PoE)

**Marca :** TP-Link

**Familia de productos:** Omada **Código del producto:** EAP653

**Nombre del producto :**  
EAP653

TP-Link Omada EAP653. 2,4 GHz, 5 GHz, Rango máximo de transferencia de datos: 2976 Mbit/s.  
Algoritmos de seguridad soportados: HTTPS, SNMP, SNMPv2, SNMPv3, SSH, WPA, WPA2, WPA3. Ethernet LAN, velocidad de transferencia de datos: 10,100,1000 Mbit/s. Energía sobre Ethernet (PoE). Color del producto: Blanco


| Características                                      |                                                                       | Seguridad                                         |                                                   |
|------------------------------------------------------|-----------------------------------------------------------------------|---------------------------------------------------|---------------------------------------------------|
| 2,4 GHz *                                            | ✓                                                                     | Algoritmos de seguridad soportados *              | HTTPS, SNMP, SNMPv2, SNMPv3, SSH, WPA, WPA2, WPA3 |
| 5 GHz *                                              | ✓                                                                     | MAC, filtro de direcciones                        | ✓                                                 |
| 6 GHz *                                              | ✗                                                                     | <b>Características de administración</b>          |                                                   |
| Rango máximo de transferencia de datos *             | 2976 Mbit/s                                                           | Administración basada en web                      | ✓                                                 |
| Velocidad máxima de transferencia de datos (2,4 GHz) | 574 Mbit/s                                                            | Syslog                                            | ✓                                                 |
| Velocidad máxima de transferencia de datos (5 GHz)   | 2402 Mbit/s                                                           | Firmware actualizable                             | ✓                                                 |
| Ethernet LAN, velocidad de transferencia de datos    | 10,100,1000 Mbit/s                                                    | <b>Puertos e Interfaces</b>                       |                                                   |
| Frecuencia de banda                                  | 2.4 - 5 GHz                                                           | Ethernet LAN (RJ-45) cantidad de puertos *        | 1                                                 |
| Estándares de red                                    | IEEE 802.11a, IEEE 802.11ac, IEEE 802.11b, IEEE 802.11g, IEEE 802.11h | Enchufe de entrada de CC                          | ✓                                                 |
| Tecnología de cableado                               | 10/100/1000Base-T(X)                                                  | <b>Control de energía</b>                         |                                                   |
| Número de usuarios                                   | 250 usuario(s)                                                        | Energía sobre Ethernet (PoE) *                    | ✓                                                 |
| Selección automática de canal                        | ✓                                                                     | Rango de voltaje DC                               | 12 V                                              |
| Escáner automático de canales                        | ✓                                                                     | <b>Diseño</b>                                     |                                                   |
| MIMO                                                 | ✓                                                                     | Ubicación *                                       | Techo, Pared                                      |
| Tipo MIMO                                            | Multi User MIMO                                                       | Color del producto *                              | Blanco                                            |
| Método de espectro disperso                          | OFDMA                                                                 | Botón de restaurar                                | ✓                                                 |
| Características del modo Fit AP                      | Red en malla                                                          | Indicadores LED                                   | ✓                                                 |
| Soporte VLAN                                         | ✓                                                                     | <b>Antena</b>                                     |                                                   |
| Limitar tasa                                         | ✓                                                                     | Tipo de antena *                                  | Interno                                           |
| Soporte de control de flujo                          | ✓                                                                     | <b>Peso y dimensiones</b>                         |                                                   |
| Band steering (optimización de rendimiento)          | ✓                                                                     | Ancho                                             | 160 mm                                            |
| Equidad de conexión (ATF)                            | ✓                                                                     | Profundidad                                       | 160 mm                                            |
| Calidad de servicio (QoS) soporte                    | ✓                                                                     | Altura                                            | 33,6 mm                                           |
| BeamForming (conformación de haces)                  | ✓                                                                     | <b>Empaquetado</b>                                |                                                   |
| Potencia de transmisión (CE)                         | 27 dbm                                                                | Tipo de embalaje                                  | Caja                                              |
| Potencia de transmisión (FCC)                        | 22 dbm                                                                | <b>Contenido del embalaje</b>                     |                                                   |
|                                                      |                                                                       | Cantidad por paquete                              | 1 pieza(s)                                        |
|                                                      |                                                                       | Kit de montaje                                    | ✓                                                 |
|                                                      |                                                                       | Guía de configuración rápida                      | ✓                                                 |
|                                                      |                                                                       | <b>Condiciones ambientales</b>                    |                                                   |
|                                                      |                                                                       | Intervalo de humedad relativa para funcionamiento | 10 - 90%                                          |
|                                                      |                                                                       | Intervalo de temperatura operativa                | 0 - 40 °C                                         |
|                                                      |                                                                       | Intervalo de temperatura de almacenaje            | -40 - 70 °C                                       |
|                                                      |                                                                       | Intervalo de humedad relativa durante almacenaje  | 5 - 90%                                           |



4897098685235



4897098685242

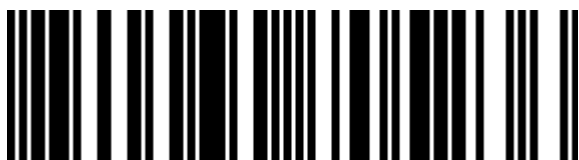

0840030705236



840030705236

### Catalog Object Cloud



Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity. Automated scraping, data mining, or harvesting for the purpose of training machine learning models, neural networks, or artificial intelligence systems is strictly prohibited without a commercial license.